



FN SCAR[®]

**INSTRUCTIONS FOR
FN SCAR[®] SSR
REAR STOCK**

These instructions cover the installation and adjustment of the FN SCAR® SSR Rear Stock Module.

The FN SCAR SSR Rear Stock is designed for improved ergonomics while shooting in supported prone positions. It is adjustable for length of pull (LOP) and cheek rest height to allow the FN SCAR to better fit the operator and shooting position for increased accuracy and comfort. It features a MIL-STD M1913 rail for attachment of monopods or other accessories that aid supported shooting positions. It represents the modular capability of the FN SCAR.

Consult your FN SCAR® owner's manual for information on the safe handling, maintenance and operation of your FN® firearm. If you do not have an owner's manual you can download a copy from www.fnamerica.com or you may request one at no charge from;

FN America, LLC, P.O. Box 9424, McLean, VA 22102.

Phone 1-(800)-635-1321, option 4 or email us at customerservice@fnamerica.com

INSTALLATION

The FN SCAR SSR Rear Stock Module will replace the original carbine rear stock included with your FN SCAR 16S or 17S.

⚠ DANGER

BEFORE PERFORMING DISASSEMBLY PROCEDURES, PLACE THE SAFETY SELECTOR IN THE "ON SAFE" POSITION. THEN (1) REMOVE THE MAGAZINE, (2) LOCK OPEN THE BOLT AS EXPLAINED IN SECTION 10.2 OF YOUR RIFLE'S OWNER'S MANUAL, AND (3) MAKE CERTAIN THE CHAMBER IS COMPLETELY UNLOADED. ALWAYS KEEP THE MUZZLE POINTED IN A SAFE DIRECTION. FAILURE TO FOLLOW THESE WARNINGS COULD RESULT IN SERIOUS INJURY OR DEATH.

⚠ DANGER

WEAR EYE PROTECTION WHEN DISASSEMBLING AND CLEANING YOUR RIFLE TO PREVENT SPRINGS, SPRING LOADED PARTS, SOLVENTS, OR OTHER AGENTS FROM CONTACTING YOUR EYES, RESULTING IN INJURY.

1. Ensure your firearm is completely unloaded and contains no ammunition as described in your FN SCAR owner's manual. Ensure the safety selector is in the "on safe" position as described in your FN SCAR owner's manual.
2. Disassemble your firearm as described in Section 19 of your FN SCAR owner's manual by removing the trigger module and original carbine buttstock assembly.
3. Install the SSR rear stock assembly onto the receiver in place of the original carbine stock as described in Section 21 of your FN SCAR owner's manual.
4. Install the trigger module frame as described in Section 21 of your FN SCAR owner's manual.

ADJUSTMENTS


⚠ DANGER

BEFORE PERFORMING STOCK ADJUSTMENT PROCEDURES, PLACE THE SAFETY SELECTOR IN THE “ON SAFE” POSITION. THEN (1) REMOVE THE MAGAZINE, (2) LOCK OPEN THE BOLT AS EXPLAINED IN SECTION 10.2 OF YOUR RIFLE’S OWNER’S MANUAL, AND (3) MAKE CERTAIN THE CHAMBER IS COMPLETELY UNLOADED. ALWAYS KEEP THE MUZZLE POINTED IN A SAFE DIRECTION. FAILURE TO FOLLOW THESE WARNINGS COULD RESULT IN SERIOUS INJURY OR DEATH.

ADJUSTING THE BUTTSTOCK FOR LENGTH OF PULL (LOP)


To adjust the length of pull (LOP), press the LOP adjustment lock (Figure 1) and push or pull butt pad assembly to change LOP as desired (Figure 2). Each increment of adjustment is equal to approximately .25” (5mm) for a total of 1.75” (45mm) of LOP adjustment. After adjusting LOP, check to see that the LOP adjustment lock is fully engaged by pushing in on the rear of the stock.

FIGURE 1

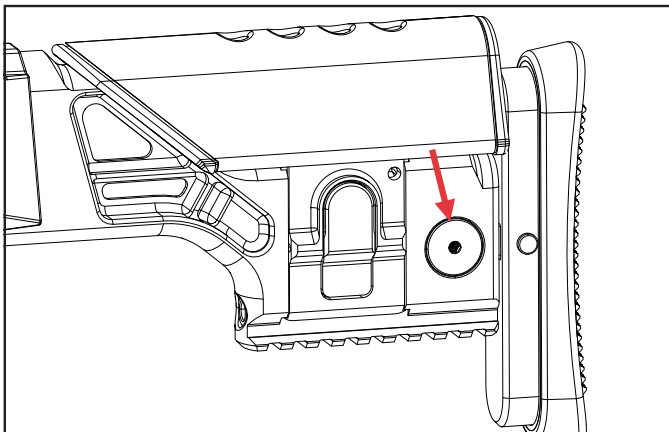

Press and hold the LOP adjustment button.

FIGURE 2

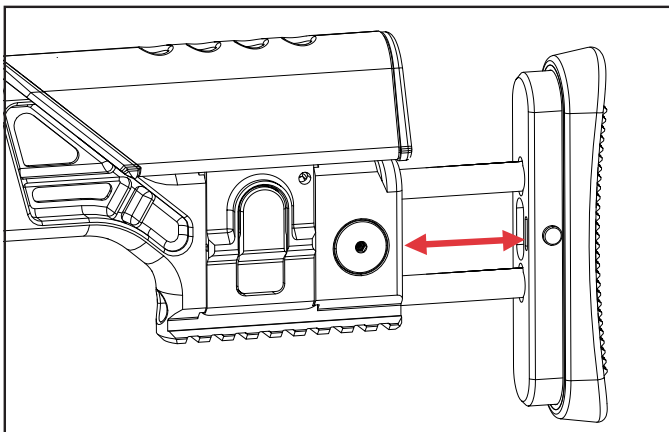


Move butt pad assembly to the desired length.

ADJUSTING THE CHEEK REST HEIGHT


To adjust the cheek rest height, press the cheek rest button (Figure 3) and push or pull the cheek rest up or down to the desired position (Figure 4). Raising the cheek rest will provide an additional 1.1" (28mm) of comb height. After adjusting the cheek rest to the desired setting, check to see that the cheek rest lock is fully engaged by pushing down on the cheek rest.

FIGURE 3

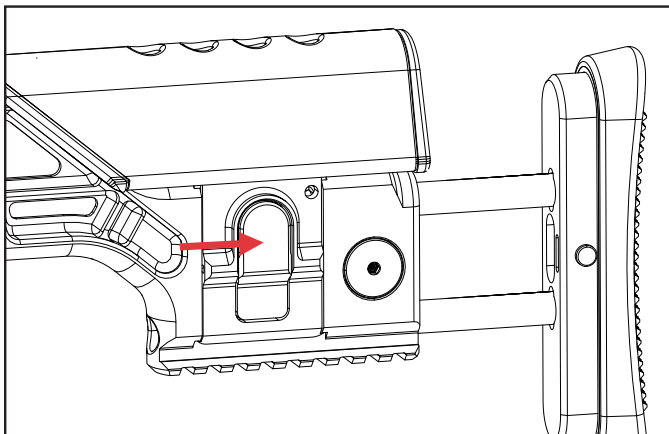

Press and hold the cheek rest button.

FIGURE 4

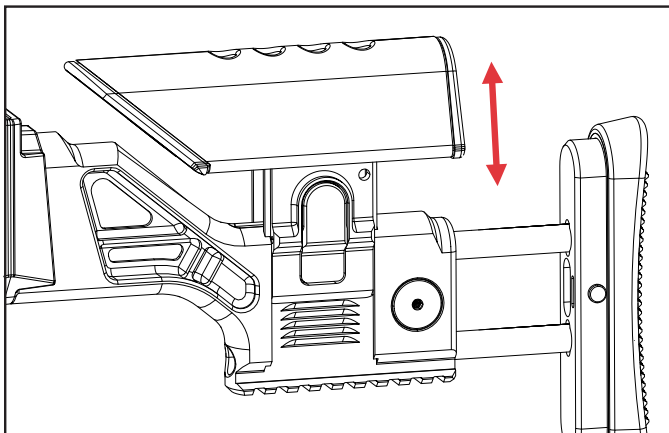

Move the cheek rest to the desired height.

ADDITIONAL INFORMATION

If you have any questions or comments concerning these instructions, please contact Customer Service at customerservice@fnamerica.com or by phone at 1-(800)-635-1321, option 4. For more information about the FN SCAR® or other FN products, please visit us online at www.fnamerica.com.



FNAMERICA.COM

SSR Rear Stock Instructions: 38-101111-0222